




F18 - 12 x 50 mL		
Carbon Fiber Centrifuge Rotor		
RPM	MAX RCF	k factor
18000	46086	782
17000	41107	876
16000	36413	989
15000	32004	1126
14000	27879	1292
13000	24039	1499
12000	20483	1759
11000	17211	2093
10000	14224	2533
9000	11521	3127
8000	9103	3958
7000	6970	5169
6000	5121	7036
5000	3556	10132
4000	2276	15831
3000	1280	28145
2000	569	63326
1000	142	253303

422 Aldo Avenue, Santa Clara, CA. 95054-2301
 800.784.3843 - Fax 408.988.1196
www.piramoon.com

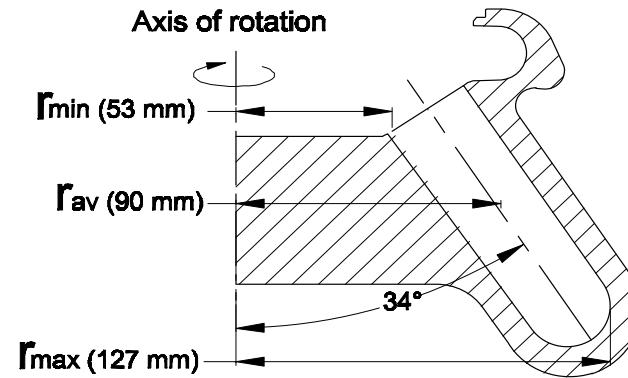

- Limited Lifetime Warranty!
- Corrosion free
- Up to 60% lighter than metallic equivalents
- Highly resistant to radiolabel contamination
- Compatible with all popular floor model centrifuges.
- No need for derating after years of use
- Fully autoclavable
- Superior insulating properties, making chilling unnecessary
- Competitively priced at or below the cost of conventional metallic rotors

Offering the rewards of 40 years of aerospace R&D to scientists and researchers everywhere. Not only is carbon fiber at the cutting edge of technology, it is also the most sensible and safe alternative to the standard aluminum and titanium alloys used today for all centrifugation rotors. With properties matching those of steel, but without the negative attributes, carbon fiber is leagues ahead of metal in regards to strength, weight, and malleability. Please contact FIBERLite for further product information.