




**F21 - 8 x 50y mL
Carbon Fiber Centrifuge Rotor**

RPM	MAX RCF	k factor
21000	52356	574
20000	47488	633
19000	42858	702
18000	38465	782
17000	34310	876
16000	30392	989
15000	26712	1126
14000	23269	1292
13000	20064	1499
12000	17096	1759
11000	14365	2093
10000	11872	2533
9000	9616	3127
8000	7598	3958
7000	5817	5169
6000	4274	7036
5000	2968	10132
4000	1900	15831
3000	1068	28145
2000	475	63326
1000	119	253303

422 Aldo Avenue, Santa Clara, CA. 95054-2301
800.784.3843 - Fax 408.988.1196
www.piramoon.com

422 Aldo Avenue, Santa Clara, CA. 95054-2301
800.784.3843 - Fax 408.988.1196
www.piramoon.com

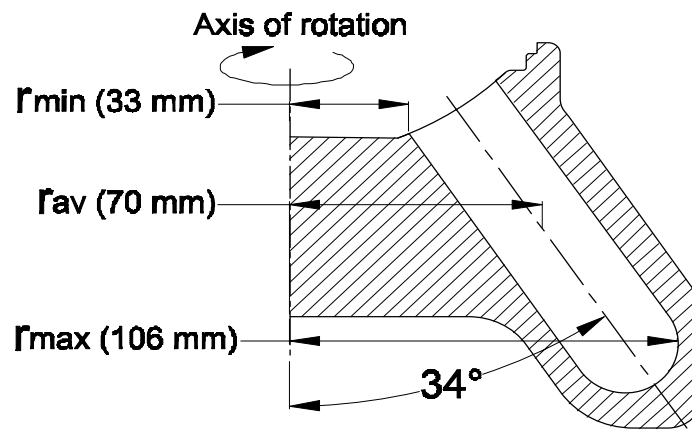

- Limited Lifetime Warranty!
- Corrosion free
- Up to 60% lighter than metallic equivalents
- Highly resistant to radiolabel contamination
- Compatible with all popular floor model centrifuges.
- No need for derating after years of use
- Fully autoclavable
- Superior insulating properties, making chilling unnecessary
- Competitively priced at or below the cost of conventional metallic rotors

Offering the rewards of 40 years of aerospace R&D to scientists and researchers everywhere. Not only is carbon fiber at the cutting edge of technology, it is also the most sensible and safe alternative to the standard aluminum and titanium alloys used today for all centrifugation rotors. With properties matching those of steel, but without the negative attributes, carbon fiber is leagues ahead of metal in regards to strength, weight, and malleability. Please contact FIBERLite for further product information.