




F45L - 6 x 100 mL		
Carbon Fiber Centrifuge Rotor		
RPM	MAX RCF	k factor
45000	219996	125
44000	210327	131
43000	200875	137
42000	191641	144
41000	182624	151
40000	173824	158
39000	165241	167
38000	156876	175
37000	148728	185
36000	140797	195
35000	133084	207
34000	125588	219
33000	118309	233
32000	111247	247
31000	104403	264
30000	97776	281
29000	91366	301
28000	85174	323
27000	79199	347
26000	73441	375

422 Aldo Avenue, Santa Clara, CA. 95054-2301
 800.784.3843 - Fax 408.988.1196
www.piramoon.com

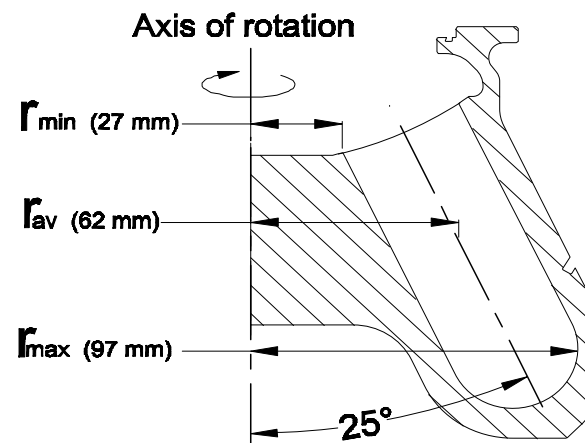

- Limited Lifetime Warranty!
- Corrosion free
- Up to 60% lighter than metallic equivalents
- Highly resistant to radiolabel contamination
- Compatible with all popular floor model centrifuges.
- No need for derating after years of use
- Fully autoclavable
- Superior insulating properties, making chilling unnecessary
- Competitively priced at or below the cost of conventional metallic rotors

Offering the rewards of 40 years of aerospace R&D to scientists and researchers everywhere. Not only is carbon fiber at the cutting edge of technology, it is also the most sensible and safe alternative to the standard aluminum and titanium alloys used today for all centrifugation rotors. With properties matching those of steel, but without the negative attributes, carbon fiber is leagues ahead of metal in regards to strength, weight, and malleability. Please contact FIBERLite for further product information.