




F6 - 4 x 1000 mL		
Carbon Fiber Centrifuge Rotor		
RPM	MAX RCF	k factor
6000	6774	7036
5750	6221	7661
5500	5692	8374
5250	5186	9190
5000	4704	10132
4750	4245	11227
4500	3810	12509
4250	3399	14024
4000	3011	15831
3750	2646	18013
3500	2305	20678
3250	1987	23981
3000	1693	28145
2750	1423	33495
2500	1176	40529
2250	953	50035
2000	753	63326
1750	576	82711
1500	423	112579
1250	294	162114

422 Aldo Avenue, Santa Clara, CA. 95054-2301  
 800.784.3843 - Fax 408.988.1196  
[www.piramoon.com](http://www.piramoon.com)

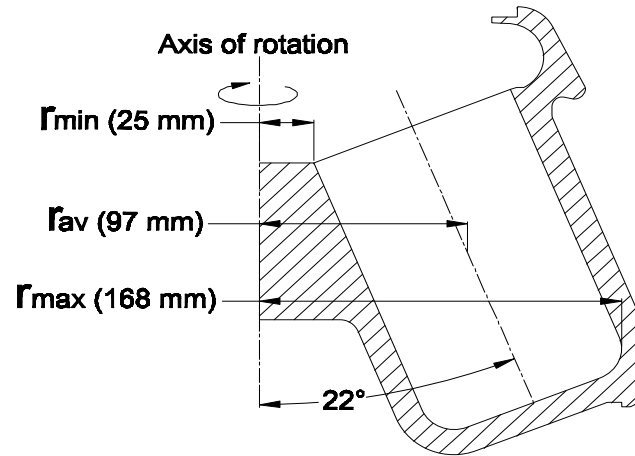

- Limited Lifetime Warranty!
- Corrosion free
- Up to 60% lighter than metallic equivalents
- Highly resistant to radiolabel contamination
- Compatible with all popular floor model centrifuges.
- No need for derating after years of use
- Fully autoclavable
- Superior insulating properties, making chilling unnecessary
- Competitively priced at or below the cost of conventional metallic rotors

Offering the rewards of 40 years of aerospace R&D to scientists and researchers everywhere. Not only is carbon fiber at the cutting edge of technology, it is also the most sensible and safe alternative to the standard aluminum and titanium alloys used today for all centrifugation rotors. With properties matching those of steel, but without the negative attributes, carbon fiber is leagues ahead of metal in regards to strength, weight, and malleability. Please contact FIBERLite for further product information.